

# Roof therm B plus

Ecological systems for thermo-acoustic insulation of cement bonded particle boards, wood fiber Therm and Isorel roofs

**Beton**  **Wood**

Complete isolation systems for high performance wooden roofs



## | DESCRIPTION

The complete natural insulating system for wood roof with high performances Roof **SolutionB plus** is ideal for home wellness and comfort in all climatic zones.


The Roof **SolutionB plus** system is characterized by excellent thermal , acoustic and breathability insulation values which reduces mold and moisture formation better than the traditional systems. In addition, the BetonWood cement bonded particle boards layer provides high compressive strength (9.000,00 KPa) and excellent fire resistance (classe A2).

The materials used are completely natural and made with sustainable raw materials and life cycles.

For more informations about the uses and the installation, our offices are ready to answer your questions on [www.betonwood.com](http://www.betonwood.com)






## | STRATIGRAPHY

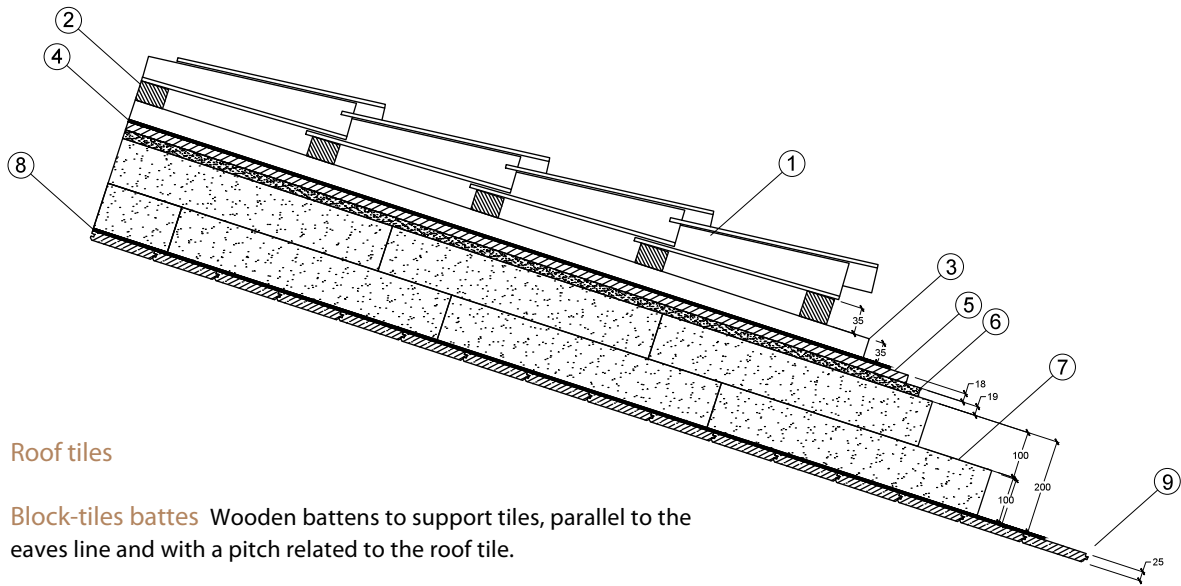

- 1 **Roof tiles**
- 2 **Block-tiles battes** Wooden battens to support tiles, parallel to the eaves line and with a pitch related to the roof tile.
- 3 **Battens for ventilation** Battens perpendicular to the gutter line directly on the insulating panel, the strips will have suitable fastening all'assito adhesion with the underlying wood, the distance of the strips is to be assessed according to the load of its own structure and the external loading actions. Thanks to the air gap, the air enters the eaves and rises to the surface, absorbing most of the heat produced by the sun's rays.
- 4 **FiberTherm multi UDB** High airtight sealant vapor barrier for renovation solutions. Extreme ease of installation for safe and simple use. It has an integrated adhesive strip to secure joints and can be used as a temporary cover.  
Size: 1,50 m x 50 m Roll surface: 75m<sup>2</sup> Weight approx.160 g/m<sup>2</sup>
- 5 **Cement bonded particle boards BetonWood** | thickness 16 mm High density panels (1.350 Kg/m<sup>3</sup>), with high compressive strenght (9.000,00 KPa) and A2 fire resistance class; the panels are made of Portland-type concrete conglomerate and high-density debarked Pine wood fiber. Depending on the needs of thermal displacement, the thickness can be varied with 20 mm thick panels.
- 6 **Wood fiber FiberTherm Isorel 230** | thickness 19 mm Panel in wood fiber density 230 Kg/m<sup>3</sup> with high compressive strenght and excellent insulating properties. Panel dimensions 2500 x 1200 mm. Edge with sharp edge
- 7 **Wood fiber FiberTherm 160** | thickness 100+100 mm Panel in wood fiber density 160 Kg/m<sup>3</sup> is offered as an excellent insulation for both the summer heat and the winter frost. Depending on requirements, the thickness can be varied with panels with thickness 80 + 80 mm or 60 + 60 mm. Panel dimensions 1350 x 600 mm. Edge with sharp edge
- 8 **FiberTherm multi membra5** Steam brake for better airtightness on the outer side of the roof, resistant to UVrays, excellent adhesion properties and tear resistance. Size: 1,50 mx50 m Roll surface: 75m<sup>2</sup> Weight approx.110 g/m<sup>2</sup>
- 9 **Matchboards** | thickness 25 mm

## THERMAL DISPLACEMENT

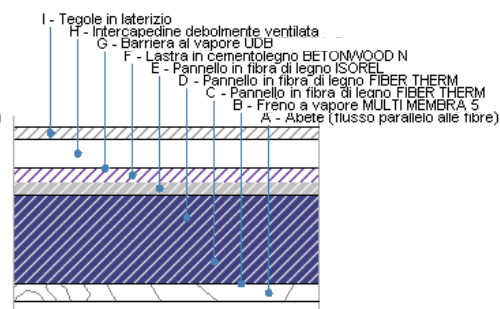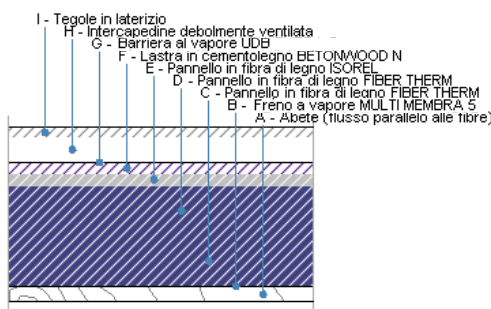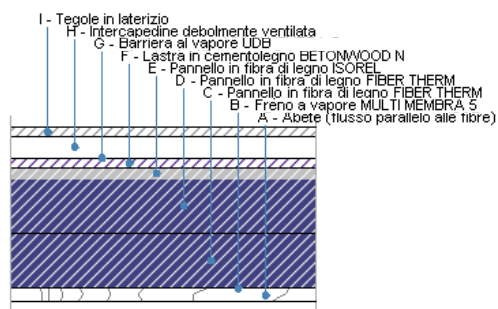

### ZONE C

#### Solution B+ - type C1

FiberTherm 100 + 100 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,162 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 6,182 (\text{m}^2\text{K}) / \text{W}$   
Displacement 15,51 hours  
Climatic zone C

#### Solution B+ - type C2

FiberTherm 80 + 80 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,195 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 5,130 (\text{m}^2\text{K}) / \text{W}$   
Displacement 13,07 hours  
Climatic zone C

#### Solution B+ - type C3

FiberTherm 60 + 60 mm  
FiberTherm Isorel 19 mm  
BetonWood 22 mm

Transmittance  $U = 0,244 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 4,098 (\text{m}^2\text{K}) / \text{W}$   
Displacement 10,56 hours  
Climatic zone C

### ZONE D

#### Solution B+ - type D1

FiberTherm 100 + 100 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,162 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 6,182 (\text{m}^2\text{K}) / \text{W}$   
Displacement 15,51 hours  
Climatic zone D

#### Solution B+ - type D2

FiberTherm 80 + 80 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,195 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 5,130 (\text{m}^2\text{K}) / \text{W}$   
Displacement 13,07 hours  
Climatic zone D

#### Solution B+ - type D3

FiberTherm 60 + 60 mm  
FiberTherm Isorel 19 mm  
BetonWood 22 mm

Transmittance  $U = 0,244 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 4,098 (\text{m}^2\text{K}) / \text{W}$   
Displacement 10,56 hours  
Climatic zone D

### ZONE E

#### Solution B+ - type E1

FiberTherm 100 + 100 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,162 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 6,183 (\text{m}^2\text{K}) / \text{W}$   
Displacement 15,52 hours  
Climatic zone E

#### Solution B+ - type E2

FiberTherm 80 + 80 mm  
FiberTherm Isorel 19 mm  
BetonWood 16 mm

Transmittance  $U = 0,195 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 5,131 (\text{m}^2\text{K}) / \text{W}$   
Displacement 13,07 hours  
Climatic zone E

#### Solution B+ - type E3

FiberTherm 60 + 60 mm  
FiberTherm Isorel 19 mm  
BetonWood 22 mm

Transmittance  $U = 0,244 \text{ W} / (\text{m}^2\text{K})$   
Resistance  $R = 4,099 (\text{m}^2\text{K}) / \text{W}$   
Displacement 10,57 hours  
Climatic zone E



## | SYSTEM'S PRODUCTS



**FiberTherm multiUDB** High airtight sealant vapor barrier for renovation solutions. Extreme ease of installation for safe and simple use. It has an integrated adhesive strip to secure joints and can be used as a temporary cover. Density 160 g / m<sup>2</sup>.



**BetonWood** The panels are made of Portland-type concrete conglomerate and high-density debarked Pine wood fibre ( $\delta=1350 \text{ Kg/m}^3$ ) and with the following thermodynamic characteristics: coefficient of thermal conductivity  $\lambda=0,26 \text{ W/mK}$ , specific heat  $c=1.88 \text{ KJ / Kg K}$ , coefficient of resistance to vapor penetration  $\mu=22,6$  and fire reaction class A2-fl-s1, according to EN 13501-1. The dimensions of the panel correspond to ... mm for a thickness of ... mm. The wood used in panel processing comes from forests controlled by FSC reforestation cycles and pressed with water and hydraulic binder (Portland cement) with high cold compression ratios.



**FiberTherm isorel** The FiberTherm Isorel 230 wood fiber is characterized by the following thermodynamic characteristics: density  $\sigma=230 \text{ Kg/m}^3$ , thermal conductivity coeff.  $\lambda=0,05 \text{ W/mK}$ , specific heat  $c=2100 \text{ J/Kg K}$ , resistance to vapor penetration coeff.  $\mu=5$  and reaction to fire class E, according to EN 13501-1 standard. The panel is recyclable and realized exclusively with wood which comes from forests controlled by FSC reforestation cycles. The panel dimensions are ... mm for a thickness of ... mm.



**FiberTherm** The panels are made of wood fiber with density  $\delta=160 \text{ Kg/m}^3$ , are produced with a wet system, in compliance with EN 13171 and EN 13986 standards under constant quality control. The material is characterized by the following thermodynamic characteristics: coefficient of thermal conductivity  $\lambda=0.039 \text{ W/mK}$ , specific heat  $c=2100 \text{ J/Kg K}$ , coefficient of resistance to vapor penetration  $\mu=5$  and reaction to fire class E, according to EN 13501-1 standard. The dimensions of the panels correspond to ... mm for a thickness of ... mm. The wood used in the processing of the panels comes from forests controlled by FSC reforestation cycles.



**FiberTherm multi membras 5** Steam brake for better airtightness on the outer side of the roof, resistant to UV rays, excellent adhesion properties and tear resistance.

BETONWOOD Srl

Head offices :  
Via Falcone e Borsellino, 58  
I-50013 Campi Bisenzio (FI)

T: +39 055 8953144  
F: +39 055 4640609

info@betonwood.com  
www.betonwood.com

TB+ - ST R.18.9

## | CERTIFICATIONS

The Solution B plus roof insulation system is produced with CE certified materials in accordance with the regulations in force.

The certificates of the individual products are available on request.

**Beton Wood**

